

Intelligent High Speed CNC Drill with Versatility

FANUC ROBODRILL

$\alpha\text{-T}21i\text{Fs}/\text{T}21i\text{F}/\text{T}21i\text{F_L}$

$\alpha\text{-T}14i\text{Fs}/\text{T}14i\text{F}/\text{T}14i\text{F_L}$

$\alpha\text{-T}21i\text{Fse}/\text{T}21i\text{Fe}/\text{T}21i\text{FLe}$

$\alpha\text{-T}14i\text{Fse}/\text{T}14i\text{Fe}/\text{T}14i\text{FLe}$



Intelligent High Speed CNC Drill with Versatility

FANUC ROBODRILL α -iF series

FANUC ROBODRILL α -iF series is a high speed versatile AI CNC drill with spindle taper size No. 30 for high precision and high efficiency production.

High speed, high precision,
and ultimate efficiency

Nano CNC System

- Has a ultra-precision pulse coder for control with interpolation and feedback in nanometers

High acceleration positioning

- Acceleration over 1.5G

Rigid structure of machine mechanism

- High precision machining at high efficiency

AI contour control I & HRV control

- Greatly reduces profile errors caused by servo delays

DDR260iB

- Additional 1 axis rotary table.
- High precision simultaneous 4-axis machining with a synchronous built-in servo motor.
- Considerably reduced index time (to 1/3 of conventional ones).



Intelligent Control

AI contour control II

- Implements very smooth machined surfaces

AI tool life management/ AI tool monitoring

- Tool life management based on frequency and time of use, and cutting load

AI thermal displacement compensation

- Compensation for thermal displacement that may occur when the spindle and feed axis operate

Robot system

- From a compact

Standard

- Program tra

FANUC

- Transfers m

Cus

- Easy equi

α-T21iFs/T21iFse
α-T14iFs/T14iFse



Space saver

Stroke X300×Y300(+100)×Z330mm


α-T21iF/T21iFe
α-T14iF/T14iFe



Best seller drill with No.30 Taper

Stroke X500×Y400×Z330mm

α-T21iFL/T21iFLe
α-T14iFL/T14iFLe

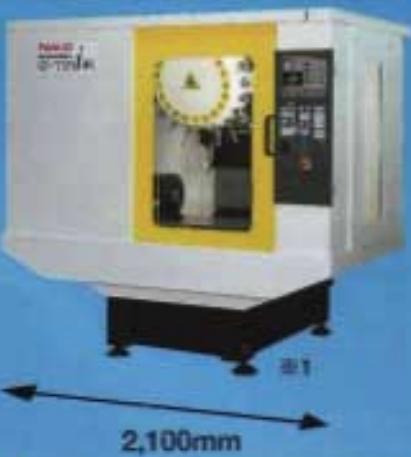

Wide stroke

Stroke X700×Y400×Z330mm

Tool turret	X-axis travel(Longitudinal movement of table)			Control unit
	300mm	500mm	700mm	
21Tools	α-T21iFs	α-T21iF	α-T21iFL	Series 31i-A5
14Tools	α-T14iFs	α-T14iF	α-T14iFL	
21Tools	α-T21iFse	α-T21iFe	α-T21iFLe	Series 31i-A
14Tools	α-T14iFse	α-T14iFe	α-T14iFLe	

**Suitable for a wide range of parts machining
and three-dimensional machining**

Robotization, Networking, and System integration

em
machining cell to a large-scale production line

Ethernet
Intranet and network building

CIMPLICITY®iCELL
achining programs and monitors the operating status
onal computer

tom PMC function
creation of sequence programs suitable for your peripheral
gment

Operational Excellence

- MANUAL GUIDE i
- Quick editor
- Production control and tool counter
- Setup file

Safety Excellence

- Conformance on the European and Chinese safety standards
- Dual check safety function
- Front door with an electromagnetic lock

Management Excellence

- ISO9001 certified
- ISO14001 certified

Versatile Applications to Meet Wide-variety of Machining Needs

Auto parts machining

Highly rigid mechanism achieves heavy machining efficiently in milling, boring and side cutting. Multi-face machining and contouring makes auto parts machining easier.



Crank case



Exhaust manifold (FCD450)

Electrical parts and small parts

High speed axis feed, high speed spindle operation and optimal acceleration and deceleration control provides efficiency of machining and reduced cycle time. This series is also suitable for machining of electrical and small parts, from high-speed cutting of light metal such as aluminum to cutting of stainless steel.



2.5" HDD frame



Stainless steel parts

Three-dimensional machining

High-speed and High-precision machining for resin models, electrodes and precision parts, is possible with high speed processing. NURBS interpolation and super-minute line segment program provide smooth machined surfaces requiring little finishing, in a short time.




Resin model



Graphite electrode

Deep and small hole drilling

Deep hole over 30 times deeper than the hole diameter and small hole about 0.1mm at its diameter can be drilled.

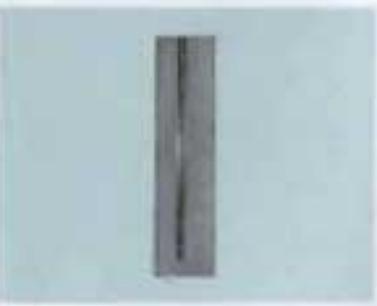

Deep hole ($\varnothing 3.3 \times 96\text{mm}$) drilling (section)
(SUS430)



$\varnothing 6 \times 150\text{mm}$
(SCM420)

Deburring and chamfering

Precise high-speed contouring allows deburring and chamfering for sophisticated parts such as magnesium mold, die cast, forged or cast parts. This series is also available for machining the datum plane at the succeeding process.



Personal computer case
(magnesium)




Gear (SCM420)

High-precision indexing is made possible by using a closed loop


High speed and high power spindle

- Spindle is directly coupled with its motor.
- Least maintenance due to grease sealed bearings.
- The high speed and high precision ball bearing is used for the high-speed spindle.
(Some of tool length measurement touch switches may not be used according to the type of it.)

Spindle output (10,000min⁻¹)

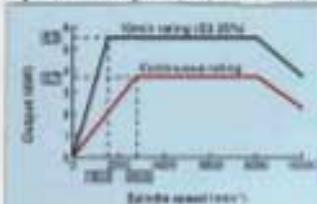

Spindle output (24,000min⁻¹)

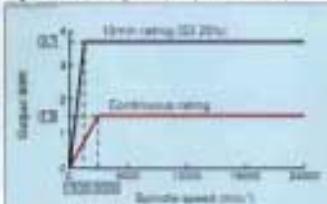

Spindle organization

Spindle	Coolant	BT tooling	DIN tooling	NCS tooling	BIG-PLUS tooling
10,000min ⁻¹	External coolant	Possible (BT30)	Possible (DIN69871-A30)	Possible NCS-46	Possible (BBT30)
	Center through coolant				
24,000min ⁻¹	External coolant	Possible (BT30)	Possible (DIN69871-A30)	Impossible	Possible (BBT30)
	Center through coolant				

Compact, very rigid basic structure and high-speed, fast-acceleration axis feed

- Rapid traverse speed :
54m/min with FANUC Series 31i-A5/
48m/min with FANUC Series 31i-A
- Max. Acceleration :
over 1.5G with FANUC Series 31i-A5/
over 1.3G with FANUC Series 31i-A
- Z-axis travel : 330mm

X-axis travel	Y-axis travel	Table working space	Table loading capacity
300mm	300+100*2 mm	630X330mm	200kg
500mm	400mm	650X400mm	300kg
700mm	400mm	800X410mm	300kg

(*) The additional amount of 100 mm is provided for improving approach characteristics during work.

High speed rigid tapping

- Max tapping up to 8,000min⁻¹ (at 24,000min⁻¹ spindle)/5,000min⁻¹ (at 10,000min⁻¹ spindle)
- Reduced tapping cycle time by quick extraction with override up to 20 times.

Superior performance for machining

Versatile machining is possible including drilling, tapping, milling and profiling.

A machining sample with 10,000min⁻¹ spindle (*1)

Workpiece	Medium carbon steel	Gray cast iron	Aluminum alloy die casting	Workpiece	Medium carbon steel	Gray cast iron	Aluminum alloy die casting
Drill diameter Drill material	25 dia. HSS	25 dia. HSS	30 dia. HSS	Tap size Tap pitch	M16 2	M20 2.5	M24 3
Spindle Speed S	318	382	637	Spindle Speed S	298	254	219
Feedrate F (*2)	48	115	255	Feedrate F (*2)	596	660	657
Coolant	Water-immiscible cutting fluid	Emulsion type water-miscible cutting fluid	Coolant	Water-immiscible cutting fluid	Emulsion type water-miscible cutting fluid		
Load meter %	155	155	202	Tolerance class	GT		

Simultaneous 4-/5-axis machining

- Additional 1-/2-axis control can be added to enable simultaneous contour control of up to 4 or 5 axes.
- High-precision indexing is made possible by using a closed loop.
- With the FANUC Series 31i-A5, One or two additional axes can be added.
- With the FANUC Series 31i-A, One additional axes can be added.
- An index table can be used to enable multi-surface machining.



Four-face machining using an additional axis and an index table
Cylinder head (ADC12)



Three-dimensional contouring using two additional axes and a tilting index table
Impeller (Aluminum alloy)

High speed and high reliable tool change (Patent pending)

- Simple and reliable proprietary tool turret mechanism
- Tool changing time (cut to cut) : 1.6sec.
- Models for 21 tools and for 14 tools are available.



Enhanced high speed and high acceleration spindle reduces machining cycle time significantly.

A machining sample with 24,000min⁻¹ spindle (*1)

Workpiece	Medium carbon steel	Aluminum alloy die casting	Workpiece	Medium carbon steel	Aluminum alloy die casting
Drill diameter Drill material	20 dia. HSS	22 dia. HSS	Tap size Tap pitch	M16 2	M24 3
Spindle Speed S	398	1012	Spindle Speed S	298	219
Feedrate F (*2)	40	253	Feedrate F (*2)	596	657
Coolant	Water-immiscible cutting fluid	Emulsion type water-miscible cutting fluid	Coolant	Water-immiscible cutting fluid	Emulsion type water-miscible cutting fluid
Load meter %	140	125	Tolerance class	GT	6H

(*1) Sample data may vary on machining conditions

(*2) Unit : mm/min

Intelligent Control

High-speed control

Bell-shaped acceleration/deceleration, in-position width switching for rapid traverse/cutting feed, rapid traverse overlapping, and other control functions, as well as AI contour control I for reading 30 blocks in advance, optimize axis motion and reduce machining cycle time.

Optimal acceleration/deceleration

During positioning, acceleration/deceleration is optimally controlled according to the torque and speed characteristics of the motor.


Making full use of the motor characteristics at a low speed reduces positioning (rapid traverse) time, resulting in reduction in machining cycle time.

HRV control

The latest and quick response servo motor *ai* series with an high-precision pulse coder of 16,000,000/rev. resolution is adopted. And a combination of HRV control, which are leading-edge digital servo/spindle control technologies, reduces possible servo delay and allows the least tracking error on high-speed machining.

Nano interpolation

Nano-interpolation is ultra-precision interpolation which calculates a position command to be transmitted to the digital servo in nanometers (nm) even when the unit used for the command in the program is μm . Together with nano-feedback by the high-precision pulse coder with a resolution of 16,000,000/rev., nano-interpolation implements very smooth movement to improve the precision of machined surfaces.

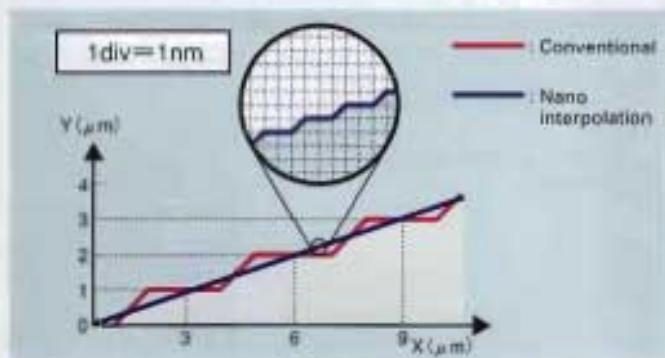


AI contour control II (option)

AI contour control II implements high-speed, high-precision machining by reading 200 blocks in advance for acceleration/deceleration control.

The number of blocks to be read in advance can be increased, thereby enabling up to 1,000 blocks to be read in advance for acceleration/deceleration control. This enables high-speed, high-precision machining without feedrate variations even for a program consisting of super-minute line segments. Nano-interpolation can be used to obtain smooth machined surfaces requiring little finishing.

Jerk Control (option)


Mechanical shock during machining is reduced more than ever before by performing acceleration/deceleration control (smooth bell-shaped acceleration/deceleration before interpolation) that keeps a low level of jerk, which is the rate of change of acceleration with respect to time. In a machining program, a portion in which a specified profile is smooth but significant change in acceleration causes mechanical shock is automatically determined, and controlled so that a suitable speed is achieved.

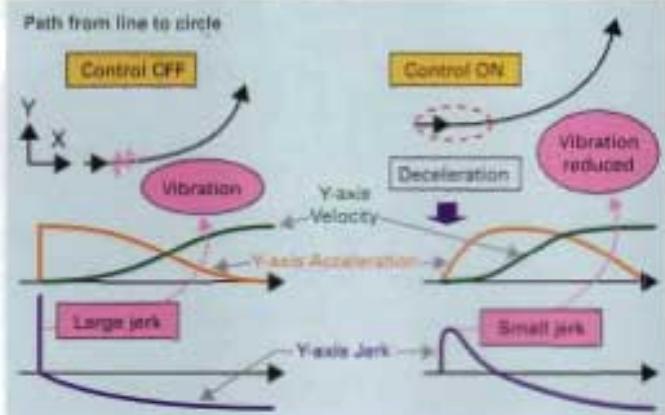

NURBS interpolation (option)

NURBS curves, which have become widespread as a method of representing free curves, can be specified in a program. High-precision interpolation is performed on each NURBS curve so that a smooth machined surface very close to the designed profile can be obtained. The size of a program can also be reduced as compared with that of a program consisting of minute straight line commands.

Note! CAM system for programming is required to support the NURBS interpolation.

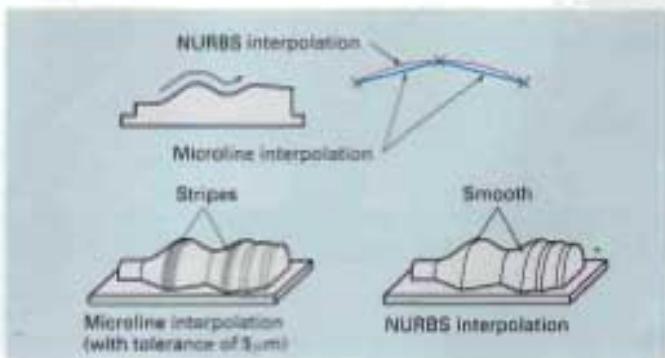

Nano-smoothing (option)


From a program consisting of minute line segments created with a CAD/CAM system, the original curved surface is estimated as NURBS curves. The generated NURBS curves are interpolated in nanometers, so that a smooth machined surface close to the designed profile can be obtained, thereby reducing the number of hand finishing process steps.

Fast data server (option)


A huge program for three-dimensional machining that contains continuous settings for small amounts of travel can be stored on the compact flash card built into the fast data server, and can be used for high-speed machining. DNC operation can also be performed from a personal computer. Memory-based operation can be performed using macro statements and subprogram calls from the compact flash card. Programs stored on the compact flash card can be edited.

AI thermal displacement compensation

Compensation for thermal displacement is carried out at real time by monitoring the operation status of the spindle and feed axis and estimating an elongation along the each axes. (The precision of compensation varies with the operating conditions.)

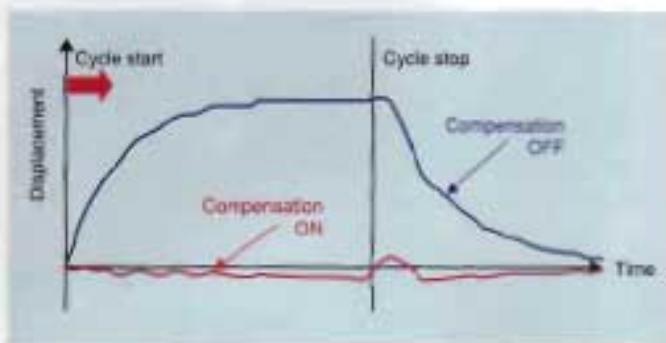


Monitor the operation status of the X-, Y-, and Z-axis and spindle

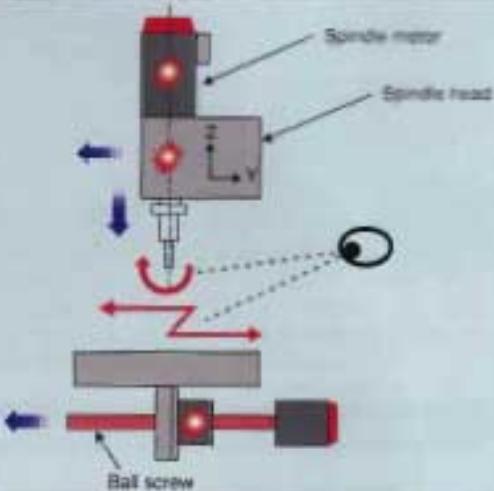

AI tool life management / AI tool monitoring (option)

The tool life management traces tool status such as frequency or time of use and replaces a tool when its usage exceeds the preset value. This prevents any trouble on cutting tools such as broken drill.

The built-in AI tool monitor watches actual load on drilling by detecting directly external disturbance load of the spindle motor. This provides superior tool management. (For usable ranges, contact FANUC.)

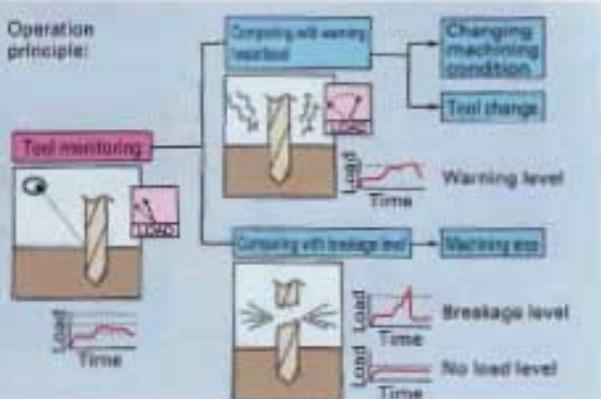


MANUAL GUIDE i

MANUAL GUIDE i can be used to perform all operations from creation of a program to machining on one screen simply. A conventional program using G codes can be created simply using a graphical menu guide. Hole position specification and pocketing can be entered simply without calculations. High-speed real animated simulation with a solid model allows simple machining simulation.



Safety

A dual check safety function is installed, which doubly monitors feedrate, position, and safety signals using two CPUs. Neither special operation nor waiting time for safety check is required. Together with the electromagnetic lock mechanism on each door, this function ensures the safety of the operators without reducing efficiency. The category-3 safety level defined in EN 954-1 is ensured.

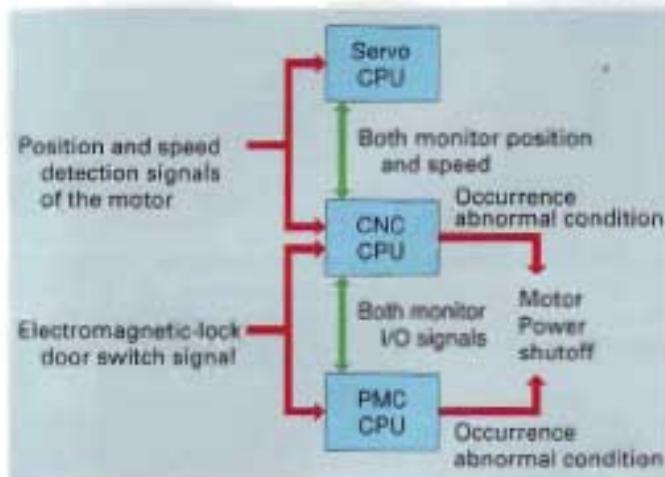

Compliance with safety regulation (option)

Compliance with safety regulation for EU countries (CE mark) and China is available.


Robotization, Networking and System Integration

Robotization

With its robot interface functions for ROBODRILL, the AI CNC drill makes it possible to configure machining systems easily for workpiece loading/unloading, deburring, and other purposes, using robots.

- Provides a built-in interlock function with consideration given to safety. (Interlock panel is not required.)
- Capable of accommodating not only one ROBODRILL with one robot but also two ROBODRILLS with one robot.
- Enables robot jogging, robot hand opening/closing, automatic side door opening/closing, system status display, and robot program selection on the robot operation screen.

It also makes it possible to configure machining robot systems that eliminate the need for peripherals by using multiple robots.

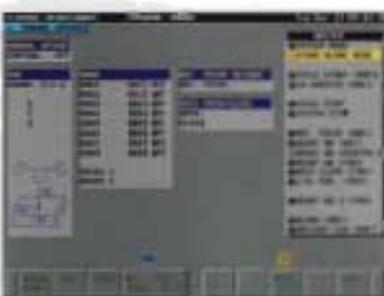

Robot operation screen



Example of robot hand




Compact machining system with LR Mate 200C



Machining robot system

Network

The Ethernet function is available as standard communication for network.

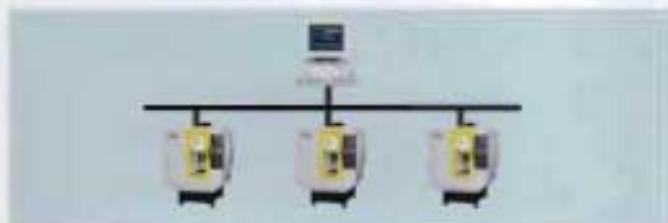

Centralized management package **FANUC CIMPACTY[®]/CELL** can be used on a personal computer connected to the network to manage ROBODRILL programs and monitor the operating status.



Equipment for system configuration

Centering system



Probe
Receiver

Broken tool detection unit



Mist separator



Coolant unit with chip conveyor



2-pallet type pallet changer installed at side



Easy Operation

Production control and tool counter

Two production monitoring counters and two accumulation counters are applicable for recognition of scheduled parts production, status display, termination of machining and so on. These counters are indispensable for production. The use status of tools with the tool life management function can also be checked using the tool counter on the same screen.




Setup file

Initial setting information can be stored such as parts coordinate system, offsets values, program identification and so on. Automated initialization for operation is available simply by calling a set of information for ease of use.

Quick editor

Quick editor used to create or edit a program is an easy-to-use full-screen editor, which can perform copy, move, search, cursor jump, and other operations like an editor for PCs. The guidance input function for G codes or M codes allows you to edit a program efficiently. Effective edit of programming is also possible through on-screen selection of G and M codes with guidance.

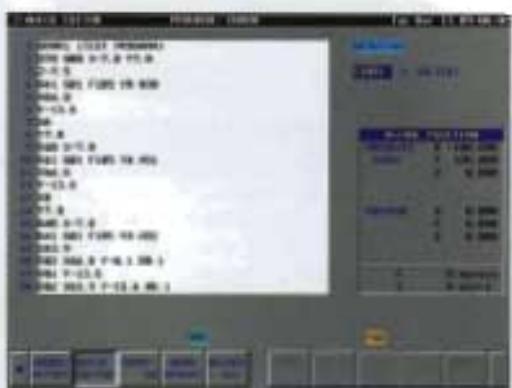

Program management

Large-sized program memory can be easily managed based on program folders and file names (each having up to 32 characters).

Compact operator's panel and 10.4" color LCD

Standard display with 10.4" color LCD integrated with the operator panel features ease of use with least key stroke operations. The soft keys vertically provided to the right of the display unit can be used as machine operation menu keys.


In a memory card slot located at the side of the display unit, a compact flash card can be inserted to perform DNC operation or to enable the card to be used as a large-sized program memory device.



* The above photo is that for α-T21iF and α-T14iF

Custom PMC

The custom PMC function which allows simple control of peripheral devices is installed as standard. A sequence program can be created and edited easily on a screen. Only PMC programs for peripheral devices can be read and written. This function provides 16 input signals and 16 output signals as basic features, and also makes available up to 1024 input signals and 1024 output signals in total as optional features to meet the needs of the customer's system.

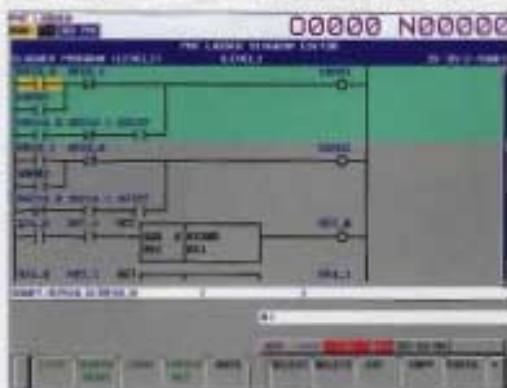

Accessory (option)



Wide opening door :
730mm for α-T14/F



Air blow for chips



Top cover



Signal lamp



Tool length switch for
automatic measurement



Coolant unit (tank)



Center through coolant



Automatic fire extinguisher (Note)



Coolant unit with chip flush
(spot gun provided)



Illumination



Intermittent
central
lubrication



Operation panel with
alphabetical key

(Note) If machining "combustible materials" such as resin and magnesium or if using a water-immiscible cutting fluid, select an automatic fire extinguishing system because of fire hazards. For information on the objects that can be extinguished by an automatic fire extinguishing system, contact your ROBODRILL sales representative.

Worldwide customer service and support

FANUC operates customer service and support system anywhere in the world through subsidiaries, affiliates and distributor partners. FANUC provides the highest quality service with the quickest response at the location nearest you.



FANUC training center




FANUC Training Center operates training programs on FANUC ROBODRILL i series throughout the year, which focus on practical operations and programming with machining know how and maintenance.






Inquiries : Yamanakako-mura,
Yamanashi, Japan 401-0501
Phone : 81-555-84-6030 Fax : 81-555-84-5640

Outer dimensions




Q-T21iFs/T14iFs/T21iFe/T14iFe

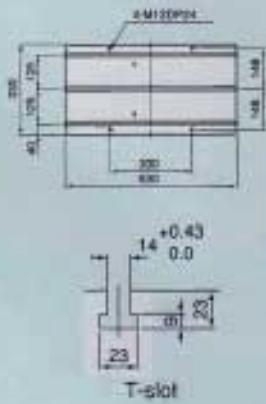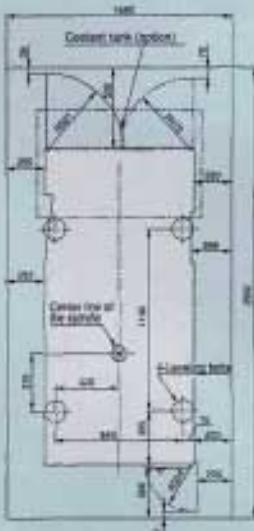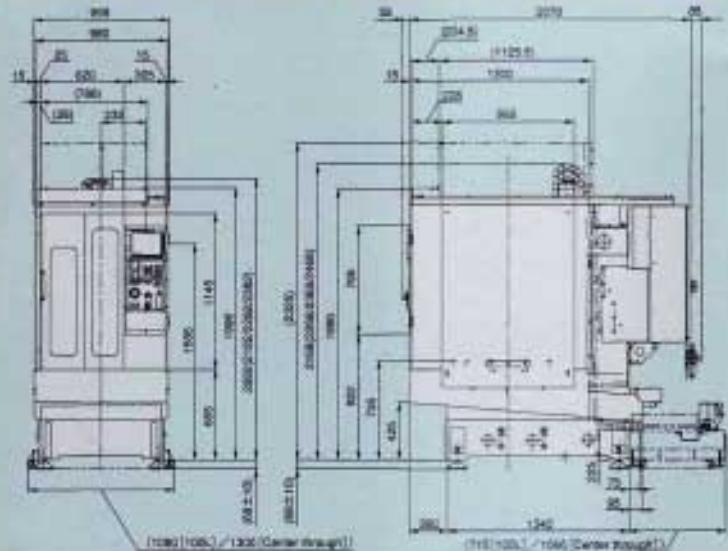

Q-T21iF/T14iF/T21iFe/T14iFe

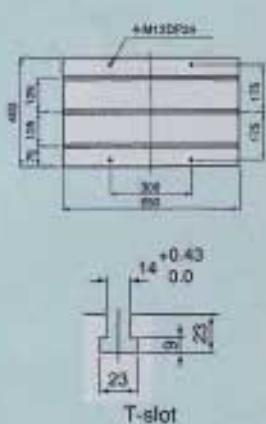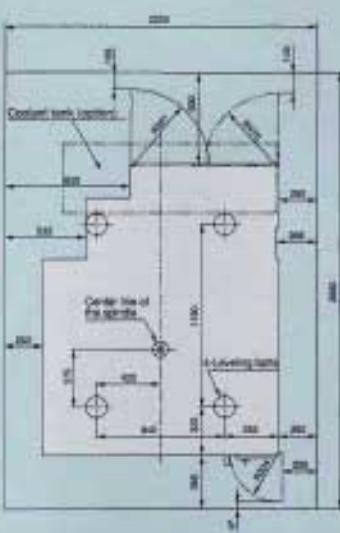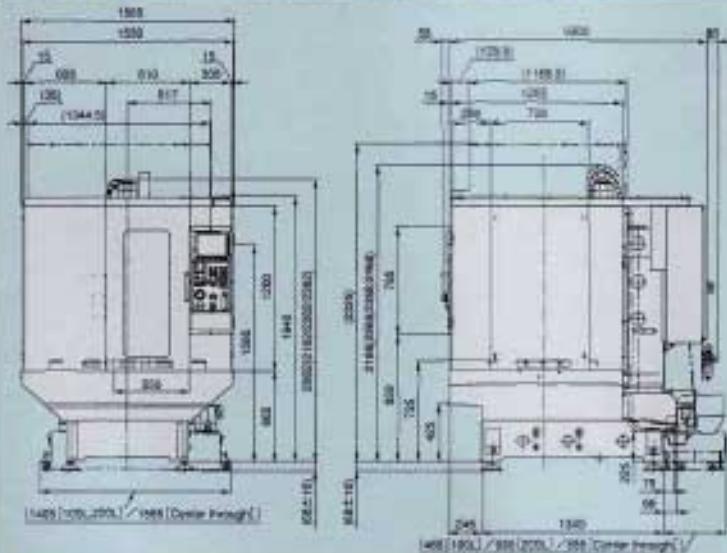

Q-T21iFu/T14iFu/T21iFe/T14iFe

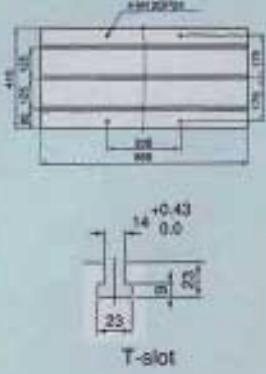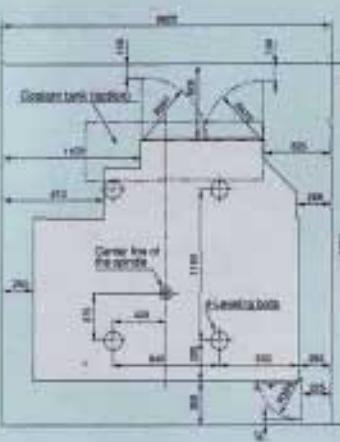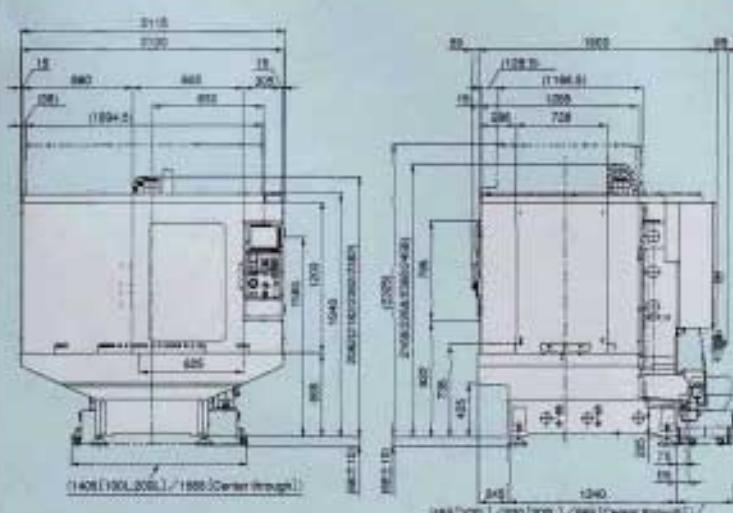

FANUC ROBODRILL α -iF series

Item	Q-T21(Fs/T21(Fs) Q-T14(Fs/T14(Fs)	Q-T21(F/T21(Fs) Q-T14(F/T14(Fs)	Q-T21(PL/T21(Fs) Q-T14(PL/T14(Fs)
Machine (Standard)			
Capacity	X-axis travel (Longitudinal movement of table) 300mm Y-axis travel (Cross movement of saddle) 300mm + 100mm Z-axis travel (Vertical movement of spindle head) 230mm Distance from table surface to spindle base plane 150 to 480mm (When no high column is specified)	500mm 400mm 300mm 700mm	
Table	Working space (X-axis × Y-axis) 630 × 230mm Capacity of workpiece mass 200kg (uniform load) Working surface configuration 3T-slots, size 14mm pitch 125mm	650 × 400mm 300kg (uniform load)	850 × 410mm
Spindle	Speed range 100 to 10,000min ⁻¹ Spindle taper No.30 (with air blowout)		
Feedrate	Rapid traverse rate 54m/min (X,Y,Z) : α-T21(Fs/T21(F/T21(Fs/T14(Fs/T14(F/T14(Fs) 48m/min (X,Y,Z) : α-T21(Fs/T21(Fs/T21(Fs/T14(Fs/T14(Fs/T14(Fs/T14(Fs)		
Tool	Feedrate 1 to 30,000mm/min		
Turret	Tool change system Turret type Type of tooling JIS B 6339-1998 ST30, MAS 403-1982 P30T-1 (45°) Tool storage capacity 21 tools : α-T21(Fs/T21(F/T21(Fs/T21(Fs/T21(Fs) 18 tools : α-T14(Fs/T14(F/T14(Fs/T14(Fs/T14(Fs/T14(Fs)		
	Maximum tool diameter 80mm Maximum tool length 200mm : α-T14(Fs/T14(Fs) 190mm (Changed by specifications) : α-T21(Fs/T21(Fs)	250mm (Changed by specifications)	
	Method of tool selection Random shortest path		
	Maximum tool mass 2kg/tool (total mass : 22kg) / 3kg/tool (total mass : 33kg) : α-T21(Fs/T21(F/T21(Fs/T21(Fs/T21(Fs) 2kg/tool (total mass : 15kg) / 3kg/tool (total mass : 22kg) : α-T14(Fs/T14(F/T14(Fs/T14(Fs/T14(Fs)		
Motors	Tool changing time (Cut To Cut) 1.0 sec. (When 2kg/tool is specified)		
Accuracy	Spindle drive motor 5.5kW (10min rating) / 3.7kW (continuous rating) Single direction positioning accuracy (*) 0.006/300mm : α-T21(Fs/T21(F/T21(Fs/T14(Fs/T14(Fs) 0.010/300mm : α-T21(Fs/T21(Fs/T21(Fs/T14(Fs/T14(Fs/T14(Fs)		
	Positioning repeatability (*) ±0.002mm		
Numerical control (Standard) (Note: α-T21(Fs/T21(F/T21(Fs/T14(Fs/T14(Fs) → α-T21(Fs/T21(Fs/T21(Fs/T14(Fs/T14(Fs)			
- Control unit FANUC Series 21i-A (1)	Optimum torque acceleration/deceleration	Dual check safety	Stop function (G81)
- Control unit FANUC Series 21i-A (2)	Background editing (Multi-path program editing)	Custom macros (G02/G03/G04/G05)	Multi-step stop (G31 P1~4)
- Basic controlled axes 3 axes (X,Y,Z)	Quick editor	Canned cycles for drilling (G73,G74,G76,G81~G88/G89)	Tool compensation memory C
- Simultaneously controlled axes 13 axes	Control unit incorporated tool display unit with 10.4" color LCD (2)	Coordinate system selection (G58/G59)	DM code, Tool geometry/ wear
- jog control	Parallel/parallel interface	Setup file	All tool life management
- Rapid traverse (m/min)	Ethernet interface	MANUAL GUIDE / Included Measurement Cycle	Production control counter
- Rigid tapping (G76)	Workpiece coordinate system (G52~G59)	Playback	All sensor warning L
- Manual handle feed	Addition of workpiece coordinate system 48 pairs	Retraction for rigid tapping	Stroke limit check before move
- Port program storage size (16Kbytes)	IOPA II	All thermal displacement compensation (XYZ axes)	Stored stroke check 1 (G02/G23)
- Number of executable programs (max.)	Halder interpretation		Custom PMC
Option (Note: Some options applicable only to certain machine model and configurations. → α-T21(Fs/T21(F/T21(Fs/T14(Fs/T14(Fs)			
- High column 100/200/300mm	Tool set cover	1-digit F code feed	All contour control L
- High speed spindle 24,000min ⁻¹	Constant unit	Inverse time feed (G33)	Look-ahead blocks expansion
- Center through coolant	(Tank capacity : 100 (140)*, 200L)	Part program storage size (2Mbytes)	Nano Smoothing/Nano Smoothing 2
- Double contact tooling (VCS-4G88/T30/HET20)	Constant unit with chip filter	Number of registered programs 4000	Tool length automatic measurement (G21)
- DM Tooling (DIN 69071-A20)	Cleaning unit for tool taper shank	Operation panel with alphanum key	High speed tap
- High torque spindle 10,000min ⁻¹	Air flow for chips	Fast data server (with Compact Flash Memory 1GB)	Backup function for power failure
- Lubrication	2-axis remote cover	Memory card	External transfer
- Rigid tapping (3 tapers)	Bed cover	FANUC CIMPULITY (CPU)	Additional I/O unit
- Tool length switch	Automatic tire extender	For personal computer	FANUC LADDER (for personal computer)
- Automatic oil lubricating	Additional controlled tools	At tool monitoring	Collision with safety regeneration
- Centralized system of grease	(Simultaneously controlled 4 axes)	Tool position offset (G45~G48)	(for I/O Matrix or Client)
- Splashguard wide opening door : 730mm (α-T21(Fs/T21(F/T21(Fs/T14(Fs))	Additional controlled 3 axes	Addition of workpiece coordinate system	3rd/4th reference position return
- Splashguard wide opening door : 1100mm (α-T21(Fs/T14(Fs/T21(Fs/T14(Fs))	(Simultaneously controlled 5 axes (G5))	300 pairs (G54~57)	Workpiece coordinate system preset (G52)
- Automatic front door opening/closing of splashguard	Single direction positioning (G00)	Scaling (G51/G50)	Automatic breaker shutdown
- Automatic side door of splashguard	Cylindrical interpolation (G27, G)	Figure copy (G72.1, G72.2)	Additional 1 axis rotary table (G28/G29)
- Side window of splashguard	Concentrical interpolation (G28, G)	Interpolation type custom macro (G30/G37)	Learning Control for Rigid Tap
- Back top cover of splashguard	Jerk control	Pack drilling cycle for small deep holes	Tool management function
- Full-covered cover of splashguard	Tool center point control (TCP)	Programmatical mirror image (G51, G52, G53)	Deactivated master/slave
	3-dimensional cutter compensation (G31)	3-dimensional coordinate conversion (G58/G59)	Power Mate CNC manager
		Tool overtravel command (G76/G77)	External touch panel interface
Installations (Note: Please make sure to comply with installation conditions specified by FANUC when installing ROBODRILL.			
Power source	Power supply 300 to 220 VAC +10 to -15% 3-phase, 50/60Hz ± 1Hz 10kVA *4		
	Compressed air supply 0.35 to 0.5MPa (0.5MPa is recommended) gauge pressure 0.15m (minimum atmospheric pressure) *5		
Machine size	Machine height 2,238 ± 10mm (When no high column is specified)		
	Front depth 395mm ± 2,210mm	1,580mm ± 2,040mm	2,115mm ± 2,040mm
	Mass of machine Approx. 1,950kg	Approx. 3,000kg	Approx. 2,100kg

*1 and *2 are measured in compliance with JIS Q9201-1987.

*3 The color LCD has been developed with high-precision technologies and thus features high visibility and image quality. Note, however, that the screen may have a few missing or constantly lit pixels.

*4 In case of center through coolant and cleaning unit for tool taper shank, additional 1.5kVA is required respectively. In case of additional 1 axis, additional maximum + 1.5kVA is required.

In case of additional 2 axes, additional maximum + 3kVA is required. A cable with 8mm² or more should be used at primary power connection.

*5 In case of center through coolant, additional + 0.03mm/min is required. In case of air blow for chips, additional + 0.2mm/min is required.

In case of side automatic door, 0.4 MPa compressed air supply or more is required.

*6 Fastening the machine to the floor mounting anchor may be required depending on the use conditions and installation environment, or to prevent the machine from toppling over due to an earthquake.

*7 In case of α-T21(Fs/T14(Fs/T21(Fs/T14(Fs)

FANUC LTD

Oshiro-imura, Yamashita 401-0597, Japan Phone 81-555-84-5555 Fax 81-555-84-5512
<http://www.fanuc.co.jp>

All specifications are subject to change without notice.
 No part of this catalog may be reproduced in any form.

The photo includes options.

The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export of ROBODRILL α-T21(Fs/T21(F/T21(Fs/T14(Fs/T14(Fs)) from Japan is subject to an export license by the government of Japan. Other models in this catalog may also be subject to export control. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.